


## AC Socket Strip or AC Power Distribution (Breaker Spec)

- AC Power Distribution made from Aluminum Extrusion Profile with light gray color. LED Switch with 15 amps and 30 amps. Build in with Surge Protection (line suppression), Over current and short circuit breaker.
- AC Power Distribution 15 amps include HO5VV-F 3x1.5 SQMM 3-meter cord for 6, 12, 20 outlets and 1.8-meter cord for 4 outlets.
- AC Power Distribution 30 amps include TIS 11-2531 VCTx3C Size 3x6 SQMM 3-meter cord.
- AC Power Distribution 15 amps UL E147650, its plug is USA style plug with ground plug by casting with the cable. The plug connects with housing by PVC Lock Slot to prevent the wire to unbound from the housing.
- AC Power Distribution 30 amps, its cord is Open End with L, N and G sign to make it convenient when connect to the Power Plug. The wire connects to the housing with Cable Gland to prevent the wire to unbound from the housing.
- Circuit Breaker with LED signal when using

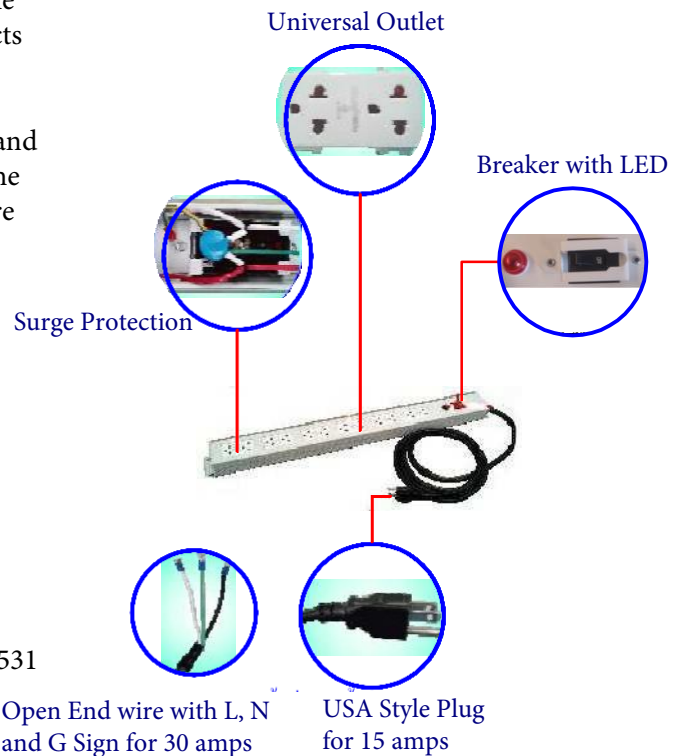

### Electrical Property

- Nominal current : 15 amps for 4, 6, 12, 20 outlets  
: 30 amps for 12, 20 outlets
- Surge current rating : 6.5 kA
- Nominal voltage : 220 Volt, 50 Hz
- Clamping voltage : 775 Volt
- Connection cable : 15 amps; UL E150631, 30 amps; TIS11-2531
- USA style plug (Male): 15 amps; UL E147650
- Outlet No. : 4, 6, 12, 20 outlets

FURUKAWA AC Power Distribution are manufactured under ISO 9001:2008 and ISO 14001 system.

Part No.	Description
F7-00004S	AC POWER DISTRIBUTION 4 Universal Outlet w/Cable 1.8 m.& Surge Protection (with breaker)
F7-00006S	AC POWER DISTRIBUTION 6 Universal Outlet w/Cable 3 m.& Surge Protection (with breaker)
F7-00012S	AC POWER DISTRIBUTION 12 Universal Outlet w/Cable 3 m.& Surge Protection (with breaker)
F7-00020S	AC POWER DISTRIBUTION 20 Universal Outlet w/Cable 3 m.& Surge Protection (with breaker)